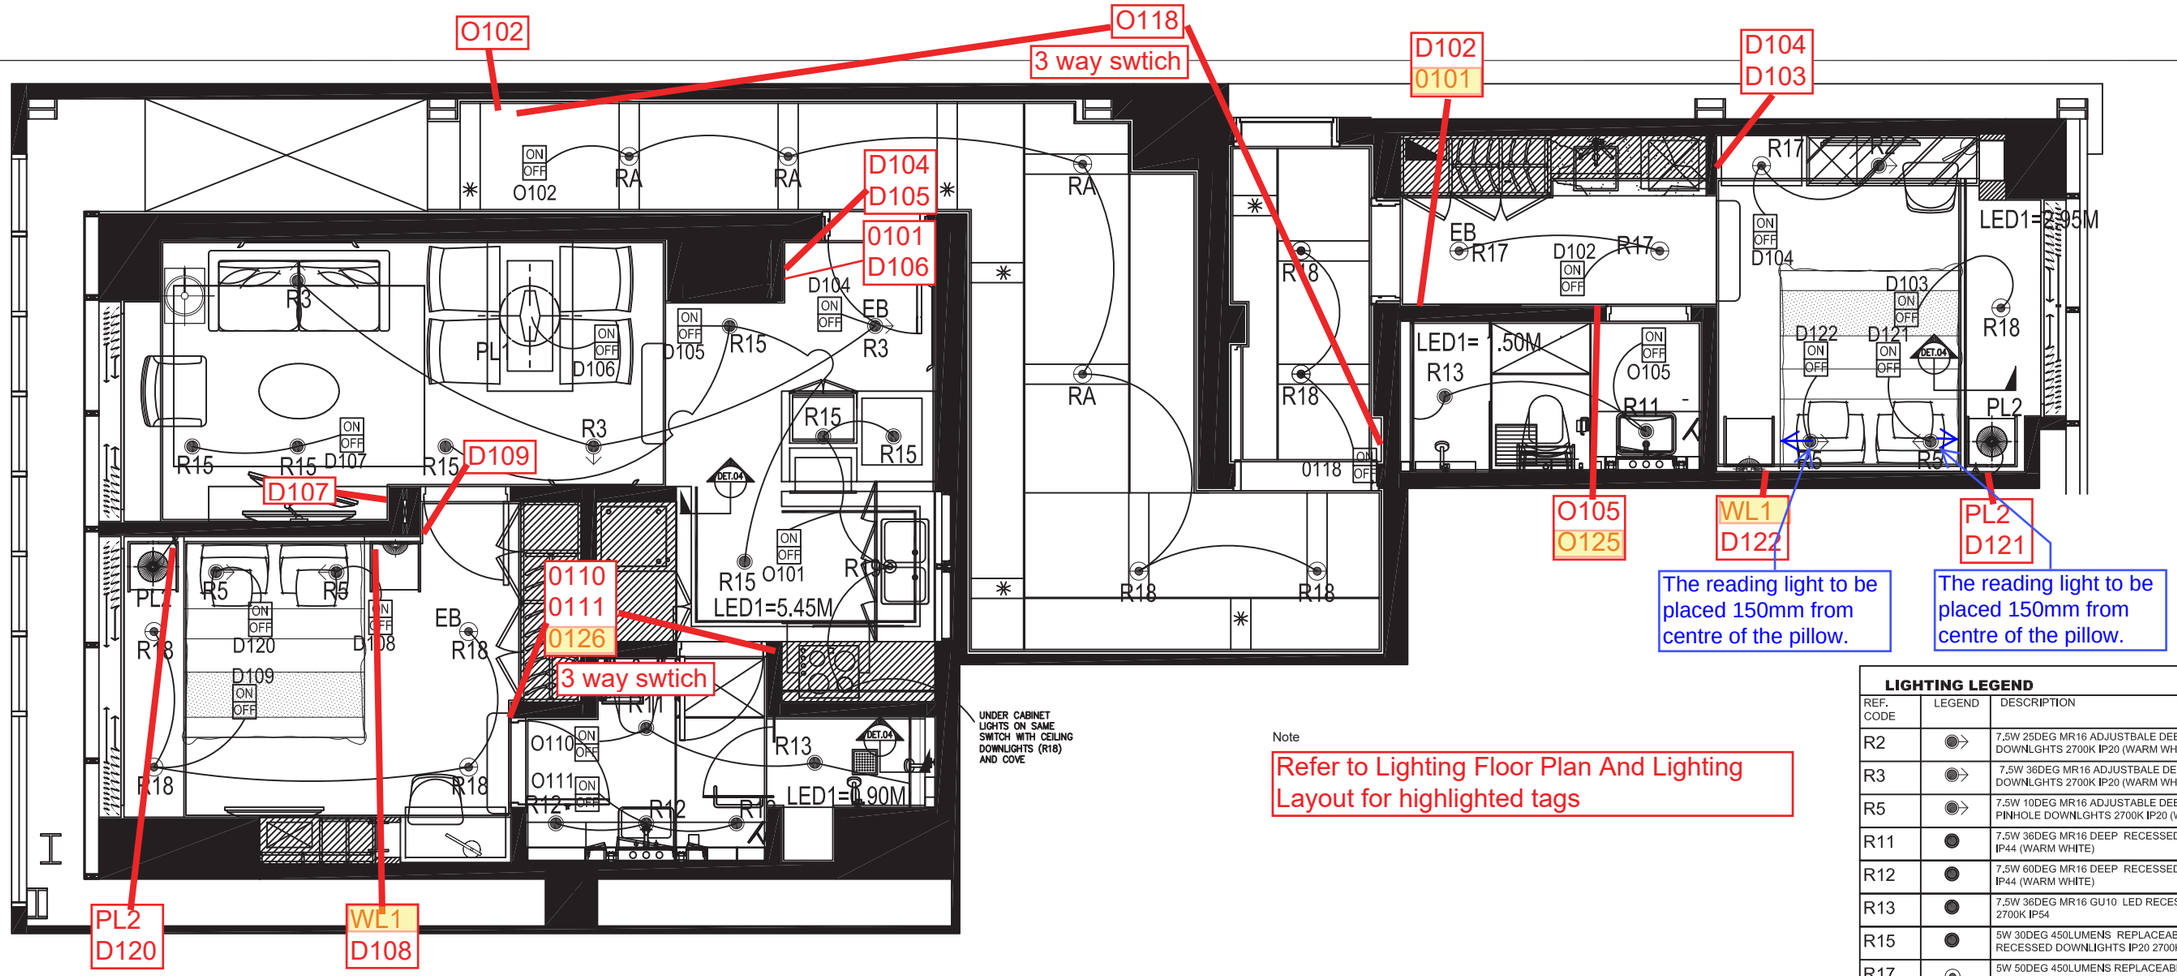

Note

Refer to Lighting Floor Plan And Lighting Layout for highlighted tags

REFLECTED CEILING PLAN AND LIGHTING LAYOUT

SCALE 1:60 MTS

LIGHTING LEGEND

REF. CODE	LEGEND	DESCRIPTION
R2		7.5W 25DEG MR16 ADJUSTBALE DEEP RECESSED DOWNLGHTS 2700K IP20 (WARM WHITE)
R3		7.5W 36DEG MR16 ADJUSTBALE DEEP RECESSED DOWNLGHTS 2700K IP20 (WARM WHITE)
R5		7.5W 10DEG MR16 ADJUSTABLE DEEP RECESSED PINHOLE DOWNLGHTS 2700K IP20 (WARM WHITE)
R11		7.5W 36DEG MR16 DEEP RECESSED DOWNLGHTS 2700K IP44 (WARM WHITE)
R12		7.5W 60DEG MR16 DEEP RECESSED DOWNLGHTS 2700K IP44 (WARM WHITE)
R13		7.5W 36DEG MR16 GU10 LED RECESSED DOWNLIGHTS 2700K IP54
R15		5W 30DEG 450LUMENS REPLACEABLE LED MODULE DEEP RECESSED DOWNLIGHTS IP20 2700K (WARM WHITE)
R17		5W 50DEG 450LUMENS REPLACEABLE LED MODULE DEEP RECESSED DOWNLIGHTS IP20 2700K (WARM WHITE)
R18		9W 50DEG 600LUMENS REPLACEABLE LED MODULE DEEP RECESSED DOWNLIGHTS IP20 2700K (WARM WHITE)
R19		25W 50DEG 1800 LUMENS REPLACEABLE LED MODULE DEEP RECESSED DOWNLIGHTS IP20 2700K (WARM WHITE)
LED1		9.6W/M LED STRIPS WITH 45DEG ALUMINUM PROFILE OR ALUMINUM PROFILE WITH ADJUSTABLE MOUNTING TILT 2700K IP65
LED1B		9.6W/M LED STRIPS WITH ALUMINUM PROFILE 3000K IP65
LED2		9.6W/M LED STRIPS WITH RECESSED ALUMINUM PROFILE AND OPAL PMMA DIFFUSER 2700K IP65
RA		19W E27 REPLACEABLE A19 OR A20 LED DEEP RECESSED DOWNLIGHTS
EB		EMERGENCY BATTERY PACK
FL1		FLOOR LAMPS BY I.D.
TL1		TABLE LAMPS BY I.D.
WL1		WALL LAMPS BY I.D.
PL1		PENDANT LAMPS BY I.D.
PL2		PENDANT LAMPS BY I.D.
		ON/OFF
		INTEGRATED SWITCH
		MICRO SWITCH

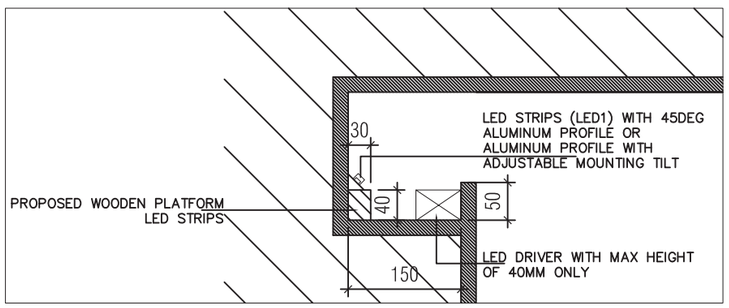

DETAIL 01

SCALE 1:40 MTS

PROJECT NAME	DRAWING TITLE	DRAWING INFORMATION
PROPOSED 32-STOREY SERVICE APARTMENT SALCEDO VILLAGE, MAKATI CITY CLIENT: GRAND TIDE INC.	**MOCK-UP ROOM** REFLECTED CEILING PLAN AND LIGHTING LAYOUT	LL-MUR-02 — 9 DESIGN BY: JE DATE OF ISSUE: 22ND JANUARY 2017 CHECKED BY: JE STATUS: CONSTRUCTION DRAWN BY: JE SCALE: AS SHOWN @A3

AMENDMENT / ISSUE REGISTER

REV.	DESCRIPTION	DRAWN	CHECKED	DATE
0	DESIGN DEVELOPMENT	JE	JE	05.17.17
1	DESIGN DEVELOPMENT	JE	JE	05.23.17
2	DESIGN DEVELOPMENT	JE	JE	04.10.17
3	DESIGN DEVELOPMENT	JE	JE	05.03.17
4	DESIGN DEVELOPMENT	JE	JE	05.22.17

AMENDMENT / ISSUE REGISTER

	DESCRIPTION	DRAWN	CHECKED	DATE
5	DESIGN DEVELOPMENT	JE	JE	06.05.17
6	DESIGN DEVELOPMENT	JE	JE	06.13.17
7	DESIGN DEVELOPMENT	JE	JE	01.03.18
8	DESIGN DEVELOPMENT	JE	JE	01.10.18
9	DESIGN DEVELOPMENT	JE	JE	01.22.18

AR. BUENAVENTURA T. MADDATU II
LIGHTING DESIGNER
PROJECT 7, QUEZON CITY
63917-8268601 * 632- 5089313 * 632-2112672

REMARKS
: All directional lighting fixtures are to be aimed on site.
: All dimensions and cut out for installation details are to be verified by the contractor on site.
: Light grouping refers to lighting scenario only based which lights to be on at the same time. Power loading and circuiting is not taken into consideration.
: The contractor should take full responsibility to highlight any descrepancise between drawings and actual site condition for lighting designer confirmation and approval.